




6

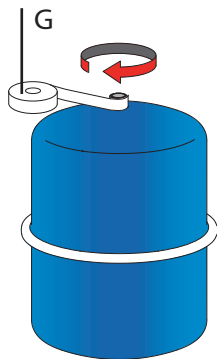


7

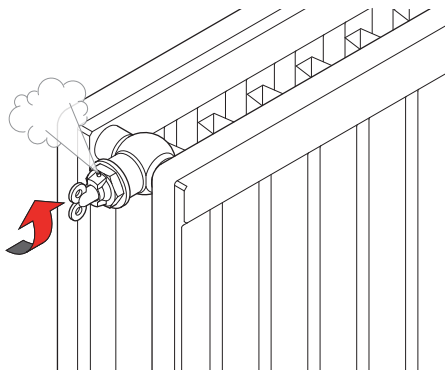


8

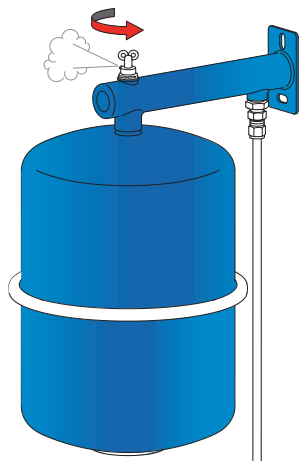


9

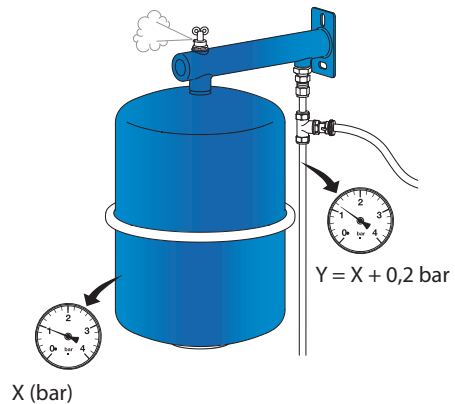

10

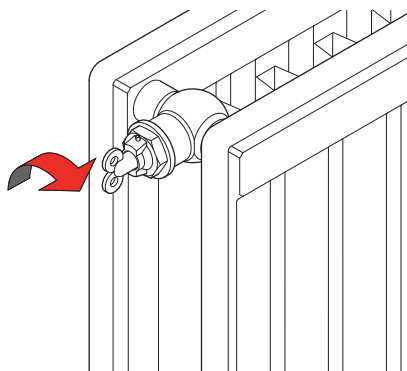


11

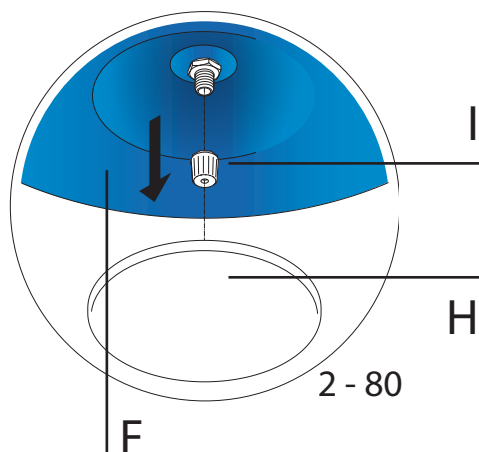

ViRA®

- Maximum working pressure: 8.0 bar.
- Tanks according to EN13831.
- Suitable for systems with a maximum system temperature of 120 °C.
- Min./maximum temperature diaphragm: -10 / 110 °C.
- Suitable for adding up to 50% glycol-based antifreeze.
- Deep-drawn, zinc-plated steel shackle collar.
- Complies with Pressure Equipment Directive 2014/68/EU.
- White (RAL 9010) epoxy powder coating.
- Viraxpan 35 - 80: Including stand and mounting kit.

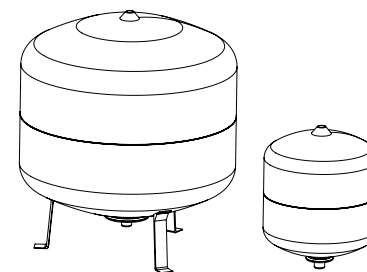

- Maximum working pressure: 10.0 bar.
- Tanks according to EN13831.
- Suitable for systems with a maximum system temperature of 120 °C.
- Min./maximum temperature diaphragm: -10 / 110 °C.
- It is completely welded.
- Suitable for adding up to 50% glycol-based antifreeze.
- Complies with Pressure Equipment Directive 2014/68/EU.
- Tilting size:
 - 800L: 1865mm.
 - 1000L: 2195mm.
- Red (RAL 3002) epoxy powder coating.
- Viraxpan 110 - 300: mounting kit incl.

